




## PRODUCT TECHNICAL DATA SHEET

TECHNICAL DATA SHEET NO.:17021000 a 17023000	FECHA: 11.07.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: UNID
CITY: LOECHES	

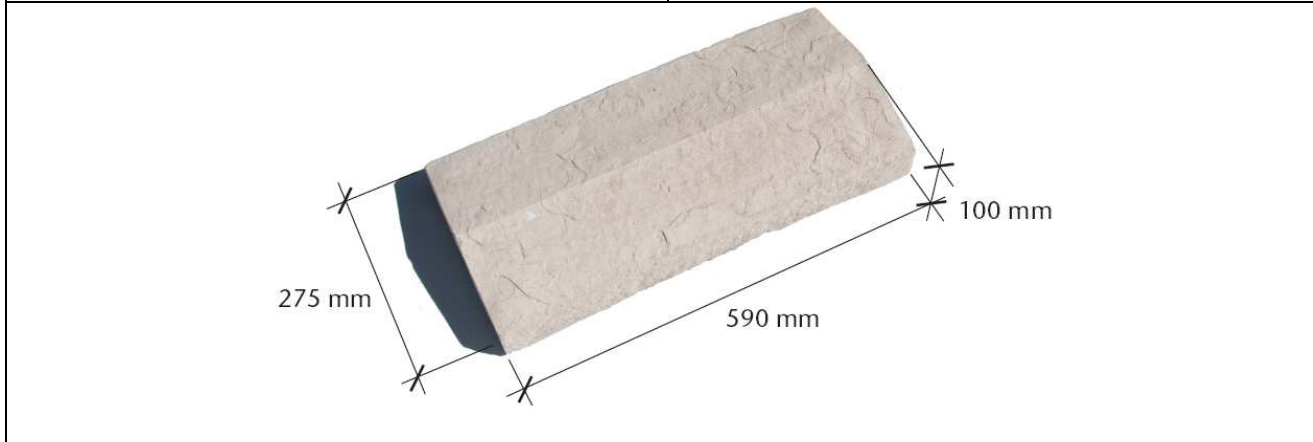

DESIGNATION OF THE MODEL:	ALBARDILLA DE VALLA VA1
MASS COLOURING:	A PETICIÓN DEL CLIENTE
THICKNESS:	100mm
NOMINAL DIMENSIONS:	590X275mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
<b>Appearance and colour.</b>			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
<b>Dimensional characteristics.</b>			
Length of flat pieces.	UNE EN 14617-16	590,0	± 5mm
Width of flat pieces.	UNE EN 14617-16	274,6	± 5mm
Thickness of flat pieces.	UNE EN 14617-16	98,9	± 5mm
<b>Physical Characteristics.</b>			
Water absorption.	UNE EN 14617-1	8,3	10 ± 2 %
Apparent density.	UNE EN 14617-1	2000	kg/m <sup>3</sup>
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
<b>Mechanical characteristics.</b>			
Durability (Frost susceptibility).	UNE EN 14617-5	Non – Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28	± 2 MPa
Flexural strength	UNE EN 14617-2	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	--	--
<b>TECHNICAL BUILDING CODE</b>			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	EN 20140-10	0,376	W/m. K

\* Adhesive Cement recommended by ECOPIEDRA, S.L.

\*\* Mortar for Joints recommended by ECOPIEDRA, S.L.

Quality Department

ECOPIEDRA, S.L.

IF-8/00