




## PRODUCT TECHNICAL DATA SHEET

TECHNICAL DATA SHEET NO.:14081101,14082101,14083101	DATE: 12.07.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: UNID
CITY: LOECHES	

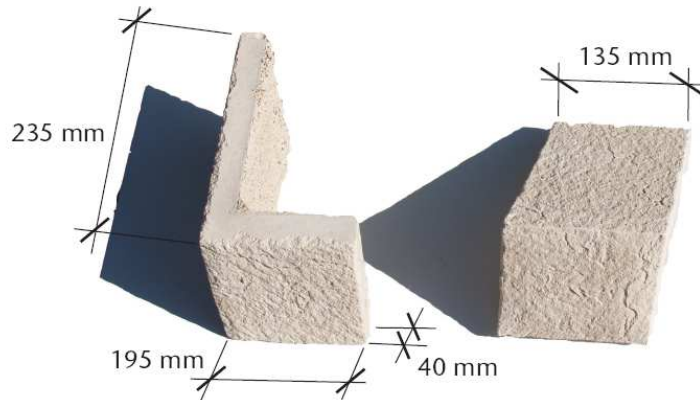

DESIGNATION OF THE MODEL:	DOVELA OBLÍCUA DERECHA CON VUELTA
MASS COLOURING:	A PETICIÓN DEL CLIENTE
THICKNESS:	40mm
NOMINAL DIMENSIONS:	235X135X195mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
<b>Appearance and colour.</b>			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
<b>Características dimensionales.</b>			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	2,7	≤ 5mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	235,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	133,9	± 5mm
Corner piece width. (long).	UNE EN 14617-16 ECO-PE- 09	191,9	± 5mm
Corner piece width. (short).	UNE EN 14617-16 ECO-PE- 09	40,4	± 5mm
<b>Corner piece thickness.</b>			
<b>Physical Characteristics.</b>	UNE EN 14617-1	10,6	10 ± 2%
Water absorption.	UNE EN 14617-1	1700	kg/m <sup>3</sup>
Apparent density.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
<b>Efflorescence*.</b>			
<b>Mechanical characteristics.</b>	UNE EN 14617-5	Non – Frost Susceptibility (NFS)	--
Durability (Frost susceptibility).	UNE EN 1015-11	28	± 2 MPa
Compressive strength.	UNE EN 1015-11	4,5	± 0,5MPa
Flexural strength	UNE EN 14617-6	No changes in appearance of the face	--
Thermal shock resistance.	UNE EN 1348	> 1,0	± 0,5MPa
Adherence*.	UNE EN 1015-12	--	--
<b>TECHNICAL BUILDING CODE</b>			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Thermal resistance (R)		0,10	m <sup>2</sup> .K/W
Thermal conductivity (λ)	UNE EN 12667	0,376	W/m. K
Transmittance (U)		10,00	W/m <sup>2</sup> .K

\* Adhesive Cement recommended by ECOPIEDRA, S.L.

\*\* Mortar for Joints recommended by ECOPIEDRA, S.L.

Quality Department

ECOPIEDRA, S.L.

IF-9/00