




PRODUCT TECHNICAL DATA SHEET

TECHNICAL DATA SHEET NO.: 10013102	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 1,5ml
CITY: LOECHES	

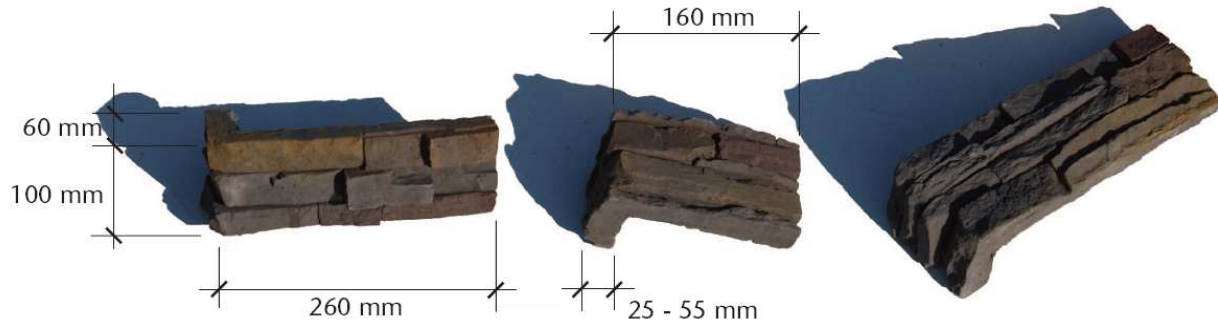


DESIGNATION OF THE MODEL:	LAJA COBRIZA ESQUINA
MASS COLOURING:	COBRIZA
THICKNESS:	Entre 25 y 55mm
NOMINAL DIMENSIONS:	160 X 60 X 100mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	3,5	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	161,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	62,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	101,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	53,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	9,9	10 ± 2 %
Apparent density.	UNE EN 14617-1	1700	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.

** Mortar for Joints recommended by ECOPIEDRA, S.L.

*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.



PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 10013102		DATE: 12.06.2008	
MANUFACTURER: ECOPIEDRA, S.L		PRESENTATION: CAJA DE 1,5ml	
CITY: LOECHES			
DESIGNATION OF THE MODEL: LAJA COBRIZA ESQUINA			
MASS COLOURING: COBRIZA			
THICKNESS: Entre 25 y 55mm			
NOMINAL DIMENSIONS: 260 X 60 X 100mm			
TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	2,9	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	261,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	62,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	102,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	53,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	10,2	10 ± 2 %
Apparent density.	UNE EN 14617-1	1700	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.

** Mortar for Joints recommended by ECOPIEDRA, S.L.


*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.



PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 10013109	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 1,5ml
CITY: LOECHES	

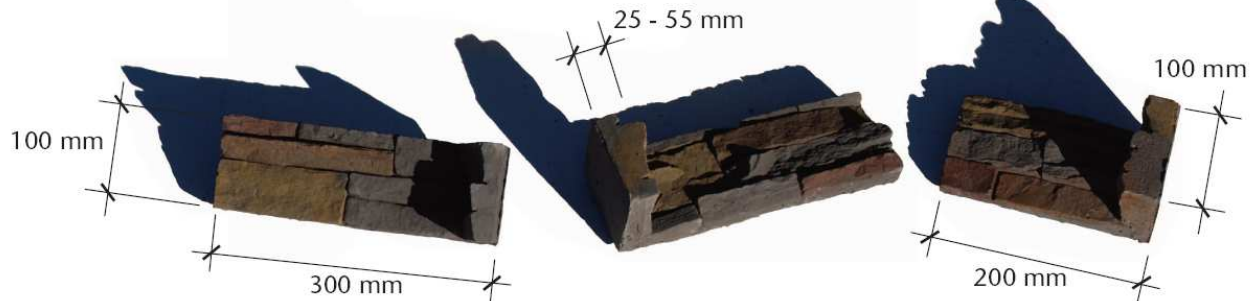

DESIGNATION OF THE MODEL:	LAJA COBRIZA ESQUINA INTERIOR
MASS COLOURING:	COBRIZA
THICKNESS:	Entre 25 y 55mm
NOMINAL DIMENSIONS:	200 X 100 X 100mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	3,0	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	199,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	100,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	100,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	53,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	10,3	10 ± 2 %
Apparent density.	UNE EN 14617-1	1800	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.

** Mortar for Joints recommended by ECOPIEDRA, S.L.


*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.



PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 10013109	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 1,5ml
CITY: LOECHES	

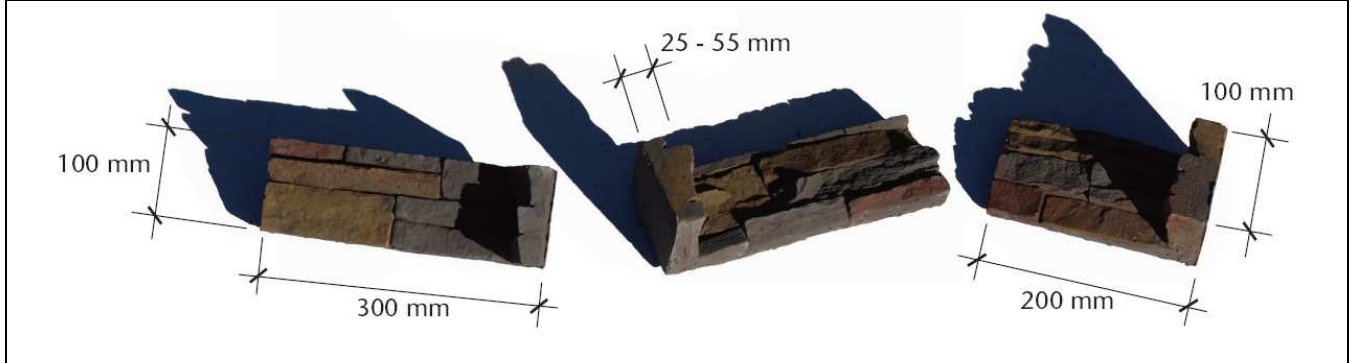

DESIGNATION OF THE MODEL:	LAJA COBRIZA ESQUINA INTERIOR
MASS COLOURING:	COBRIZA
THICKNESS:	Entre 25 y 55mm
NOMINAL DIMENSIONS:	300 X 100 X 100mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	3,0	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	299,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	100,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	100,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	53,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	10,1	10 ± 2 %
Apparent density.	UNE EN 14617-1	1700	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.

** Mortar for Joints recommended by ECOPIEDRA, S.L.

*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.


Quality Department



PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 10013105	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 1,5ml
CITY: LOECHES	

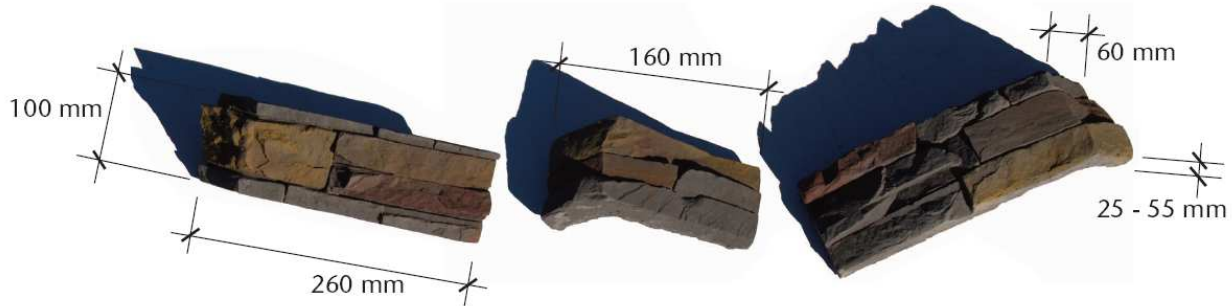

DESIGNATION OF THE MODEL:	LAJA COBRIZA ESQUINA 135°
MASS COLOURING:	COBRIZA
THICKNESS:	Entre 25 y 55mm
NOMINAL DIMENSIONS:	160 X 60 X 100mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	1,8	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	157,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	59,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	99,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	55,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	11,4	10 ± 2 %
Apparent density.	UNE EN 14617-1	1700	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.


** Mortar for Joints recommended by ECOPIEDRA, S.L.

*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.



PRODUCT TECHNICAL DATA SHEET

TECHNICAL DATA SHEET NO.: 10013105	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 1,5ml
CITY: LOECHES	

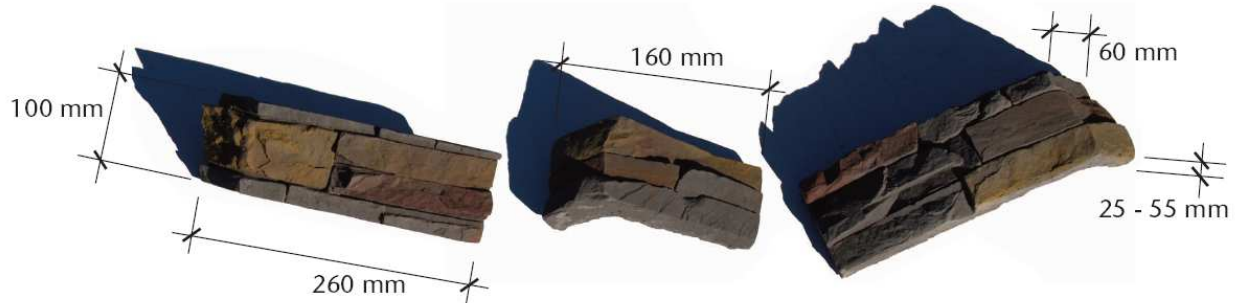

DESIGNATION OF THE MODEL:	LAJA COBRIZA ESQUINA 135°
MASS COLOURING:	COBRIZA
THICKNESS:	Entre 25 y 55mm
NOMINAL DIMENSIONS:	260 X 60 X 100mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
Appearance and colour.			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
Dimensional characteristics.			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	3,1	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	259,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	58,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	100,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	54,0	± 5mm
Physical Characteristics.			
Water absorption.	UNE EN 14617-1	11,5	10 ± 2 %
Apparent density.	UNE EN 14617-1	1700	Kg/m ³
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
Mechanical characteristics.			
Durability (Frost susceptibility).	UNE EN 14617-5	Non- Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	> 1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
TECHNICAL BUILDING CODE			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB
Thermal resistance (R)		0,05-0,10	m ² .K/W
Thermal conductivity (λ)	UNE EN 12667:02	0,376	W/m. K
Transmittance (U)		20,00-10,00	W/m ² .K

* Adhesive Cement recommended by ECOPIEDRA, S.L.

** Mortar for Joints recommended by ECOPIEDRA, S.L.

*** At www.ecopiedra.com, in Data Sheets, see the sound reduction improvement Index for different construction solutions.