




## PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 12033001	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: 8,0m <sup>2</sup> PALLET
CITY: LOECHES	

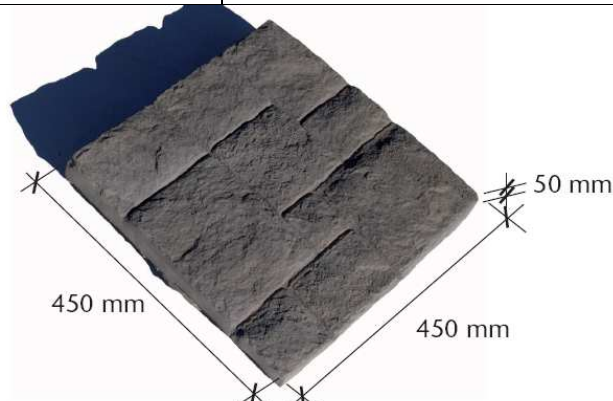

TYPE OF TILE	BALDOSA DE HORMIGÓN
CLASSIFICATION ACCORDING TO UNE EN 1339	1N 2K 1A 3U 7
DESIGNATION OF THE MODEL:	PAVIMENTO CASTILLO INGLÉS GRIS
MASS COLOURING:	GRIS
THICKNESS:	50,0mm
NOMINAL DIMENSIONS:	450x450mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCE REQUIRED BY THE BRAND																																																																																																																																				
<b>Appearance and colour.</b>																																																																																																																																							
Changes in design colour.	Visual	Not accepted.	--																																																																																																																																				
Changes in design appearance of the face.	Visual	Not accepted.	--																																																																																																																																				
Surface finish.	UNE EN 1339	Unpolished bas-relief.	--																																																																																																																																				
<b>Dimensional requisites.</b>																																																																																																																																							
Note: All dimensions are expressed in mm.																																																																																																																																							
			<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Nominal dimension</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td rowspan="3" style="text-align: center;">1</td> <td rowspan="3" style="text-align: center;">N</td> <td rowspan="3" style="text-align: center;">all</td> <td style="text-align: center;">±5</td> </tr> <tr> <td style="text-align: center;">±5</td> </tr> <tr> <td style="text-align: center;">±3</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Diagonal</th> <th>Max. dif.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">K</td> <td style="text-align: center;">≤ 850</td> <td style="text-align: center;">3</td> </tr> </tbody> </table> </td> </tr> <tr> <td>Thickness of the double layer</td> <td>UNE EN 1339</td> <td>Single layer</td> <td>--</td> </tr> <tr> <td rowspan="3">Flatness and curvature</td> <td rowspan="3">UNE EN 1339</td> <td rowspan="3">No measurement of this characteristic</td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Avail. Leng.</th> <th>Max. Convex.</th> <th>Max. Concav.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">400</td> <td style="text-align: center;">2,0</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">440</td> <td style="text-align: center;">2,2</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">500</td> <td style="text-align: center;">2,5</td> <td style="text-align: center;">1,5</td> </tr> </tbody> </table> </td> </tr> <tr> <td rowspan="3">Bevel</td> <td rowspan="3">UNE EN 1339</td> <td rowspan="3">No measurement of this characteristic</td> <td style="text-align: center;">--</td> </tr> <tr> <td style="text-align: center;">--</td> </tr> <tr> <td style="text-align: center;">--</td> </tr> <tr style="background-color: #00FF00;"> <td colspan="4"><b>Physical Characteristics.</b></td> </tr> <tr> <td rowspan="2">Total water absorption. (%)</td> <td rowspan="2">UNE EN 1339</td> <td rowspan="2">8,6</td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Water Abs.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Not measured</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="4"><b>Mechanical characteristics.</b></td> </tr> <tr> <td rowspan="2">Flexural strength (MPa)</td> <td rowspan="2">UNE EN 1339</td> <td rowspan="2">5,3</td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic flexion</th> <th>Min. flexion</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">U</td> <td style="text-align: center;">5,0</td> <td style="text-align: center;">4,0</td> </tr> </tbody> </table> </td> </tr> <tr> <td rowspan="2">Breaking load (kN)</td> <td rowspan="2">UNE EN 1339</td> <td rowspan="2">7,3</td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic breaking load</th> <th>Min. breaking load</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">70</td> <td style="text-align: center;">7</td> <td style="text-align: center;">7,0</td> <td style="text-align: center;">5,6</td> </tr> </tbody> </table> </td> </tr> <tr> <td rowspan="4">Wear resistance due to abrasion (mm)</td> <td rowspan="4">UNE EN 1339</td> <td rowspan="4">No measurement of this characteristic</td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Appendix G</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">F</td> <td style="text-align: center;">No measurement</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">G</td> <td style="text-align: center;">≤ 26</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">H</td> <td style="text-align: center;">≤ 23</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">I</td> <td style="text-align: center;">≤ 20</td> </tr> </tbody> </table> </td> </tr> <tr> <td rowspan="4">Slipping/sliding resistance</td> <td rowspan="4">UNE EN 1339</td> <td rowspan="4">No measurement of this characteristic</td> <td style="text-align: center;">USRV&gt;45</td> </tr> <tr> <td style="text-align: center;">USRV&gt;45</td> </tr> <tr> <td style="text-align: center;">USRV&gt;45</td> </tr> <tr> <td style="text-align: center;">USRV&gt;45</td> </tr> <tr style="background-color: #00FF00;"> <td colspan="4"><b>Thermal conductivity</b></td> </tr> <tr> <td>Thermal conductivity</td> <td>UNE EN 13369</td> <td>--</td> <td>--</td> </tr> <tr style="background-color: #00FF00;"> <td colspan="4"><b>Fire resistance</b></td> </tr> <tr> <td>Fire resistance</td> <td>EN ISO 1716:02 EN ISO 1182:02</td> <td>CLASS A1*</td> <td>CLASS A1*</td> </tr> </tbody> </table>	Class	Marking	Nominal dimension	Tolerance	1	N	all	±5	±5	±3				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Diagonal</th> <th>Max. dif.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">K</td> <td style="text-align: center;">≤ 850</td> <td style="text-align: center;">3</td> </tr> </tbody> </table>	Class	Marking	Diagonal	Max. dif.	2	K	≤ 850	3	Thickness of the double layer	UNE EN 1339	Single layer	--	Flatness and curvature	UNE EN 1339	No measurement of this characteristic	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Avail. Leng.</th> <th>Max. Convex.</th> <th>Max. Concav.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">400</td> <td style="text-align: center;">2,0</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">440</td> <td style="text-align: center;">2,2</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">500</td> <td style="text-align: center;">2,5</td> <td style="text-align: center;">1,5</td> </tr> </tbody> </table>	Avail. Leng.	Max. Convex.	Max. Concav.	400	2,0	1,5	440	2,2	1,5	500	2,5	1,5	Bevel	UNE EN 1339	No measurement of this characteristic	--	--	--	<b>Physical Characteristics.</b>				Total water absorption. (%)	UNE EN 1339	8,6	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Water Abs.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Not measured</td> </tr> </tbody> </table>	Class	Marking	Water Abs.	1	A	Not measured	<b>Mechanical characteristics.</b>				Flexural strength (MPa)	UNE EN 1339	5,3	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic flexion</th> <th>Min. flexion</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">U</td> <td style="text-align: center;">5,0</td> <td style="text-align: center;">4,0</td> </tr> </tbody> </table>	Class	Marking	Characteristic flexion	Min. flexion	3	U	5,0	4,0	Breaking load (kN)	UNE EN 1339	7,3	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic breaking load</th> <th>Min. breaking load</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">70</td> <td style="text-align: center;">7</td> <td style="text-align: center;">7,0</td> <td style="text-align: center;">5,6</td> </tr> </tbody> </table>	Class	Marking	Characteristic breaking load	Min. breaking load	70	7	7,0	5,6	Wear resistance due to abrasion (mm)	UNE EN 1339	No measurement of this characteristic	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Appendix G</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">F</td> <td style="text-align: center;">No measurement</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">G</td> <td style="text-align: center;">≤ 26</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">H</td> <td style="text-align: center;">≤ 23</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">I</td> <td style="text-align: center;">≤ 20</td> </tr> </tbody> </table>	Class	Marking	Appendix G	1	F	No measurement	2	G	≤ 26	3	H	≤ 23	4	I	≤ 20	Slipping/sliding resistance	UNE EN 1339	No measurement of this characteristic	USRV>45	USRV>45	USRV>45	USRV>45	<b>Thermal conductivity</b>				Thermal conductivity	UNE EN 13369	--	--	<b>Fire resistance</b>				Fire resistance	EN ISO 1716:02 EN ISO 1182:02	CLASS A1*	CLASS A1*
Class	Marking	Nominal dimension	Tolerance																																																																																																																																				
1	N	all	±5																																																																																																																																				
			±5																																																																																																																																				
			±3																																																																																																																																				
			<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Diagonal</th> <th>Max. dif.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">K</td> <td style="text-align: center;">≤ 850</td> <td style="text-align: center;">3</td> </tr> </tbody> </table>	Class	Marking	Diagonal	Max. dif.	2	K	≤ 850	3																																																																																																																												
Class	Marking	Diagonal	Max. dif.																																																																																																																																				
2	K	≤ 850	3																																																																																																																																				
Thickness of the double layer	UNE EN 1339	Single layer	--																																																																																																																																				
Flatness and curvature	UNE EN 1339	No measurement of this characteristic	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Avail. Leng.</th> <th>Max. Convex.</th> <th>Max. Concav.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">400</td> <td style="text-align: center;">2,0</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">440</td> <td style="text-align: center;">2,2</td> <td style="text-align: center;">1,5</td> </tr> <tr> <td style="text-align: center;">500</td> <td style="text-align: center;">2,5</td> <td style="text-align: center;">1,5</td> </tr> </tbody> </table>	Avail. Leng.	Max. Convex.	Max. Concav.	400	2,0	1,5	440	2,2	1,5	500	2,5	1,5																																																																																																																								
			Avail. Leng.	Max. Convex.	Max. Concav.																																																																																																																																		
			400	2,0	1,5																																																																																																																																		
440	2,2	1,5																																																																																																																																					
500	2,5	1,5																																																																																																																																					
Bevel	UNE EN 1339	No measurement of this characteristic	--																																																																																																																																				
			--																																																																																																																																				
			--																																																																																																																																				
<b>Physical Characteristics.</b>																																																																																																																																							
Total water absorption. (%)	UNE EN 1339	8,6	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Water Abs.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Not measured</td> </tr> </tbody> </table>	Class	Marking	Water Abs.	1	A	Not measured																																																																																																																														
			Class	Marking	Water Abs.																																																																																																																																		
1	A	Not measured																																																																																																																																					
<b>Mechanical characteristics.</b>																																																																																																																																							
Flexural strength (MPa)	UNE EN 1339	5,3	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic flexion</th> <th>Min. flexion</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">U</td> <td style="text-align: center;">5,0</td> <td style="text-align: center;">4,0</td> </tr> </tbody> </table>	Class	Marking	Characteristic flexion	Min. flexion	3	U	5,0	4,0																																																																																																																												
			Class	Marking	Characteristic flexion	Min. flexion																																																																																																																																	
3	U	5,0	4,0																																																																																																																																				
Breaking load (kN)	UNE EN 1339	7,3	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Characteristic breaking load</th> <th>Min. breaking load</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">70</td> <td style="text-align: center;">7</td> <td style="text-align: center;">7,0</td> <td style="text-align: center;">5,6</td> </tr> </tbody> </table>	Class	Marking	Characteristic breaking load	Min. breaking load	70	7	7,0	5,6																																																																																																																												
			Class	Marking	Characteristic breaking load	Min. breaking load																																																																																																																																	
70	7	7,0	5,6																																																																																																																																				
Wear resistance due to abrasion (mm)	UNE EN 1339	No measurement of this characteristic	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Class</th> <th>Marking</th> <th>Appendix G</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">F</td> <td style="text-align: center;">No measurement</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">G</td> <td style="text-align: center;">≤ 26</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">H</td> <td style="text-align: center;">≤ 23</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">I</td> <td style="text-align: center;">≤ 20</td> </tr> </tbody> </table>	Class	Marking	Appendix G	1	F	No measurement	2	G	≤ 26	3	H	≤ 23	4	I	≤ 20																																																																																																																					
			Class	Marking	Appendix G																																																																																																																																		
			1	F	No measurement																																																																																																																																		
			2	G	≤ 26																																																																																																																																		
3	H	≤ 23																																																																																																																																					
4	I	≤ 20																																																																																																																																					
Slipping/sliding resistance	UNE EN 1339	No measurement of this characteristic	USRV>45																																																																																																																																				
			USRV>45																																																																																																																																				
			USRV>45																																																																																																																																				
			USRV>45																																																																																																																																				
<b>Thermal conductivity</b>																																																																																																																																							
Thermal conductivity	UNE EN 13369	--	--																																																																																																																																				
<b>Fire resistance</b>																																																																																																																																							
Fire resistance	EN ISO 1716:02 EN ISO 1182:02	CLASS A1*	CLASS A1*																																																																																																																																				