




## PRODUCT TECHNICAL DATA SHEET



TECHNICAL DATA SHEET NO.: 11014104	DATE: 12.06.2008
MANUFACTURER: ECOPIEDRA, S.L	PRESENTATION: CAJA DE 120ml
CITY: LOECHES	

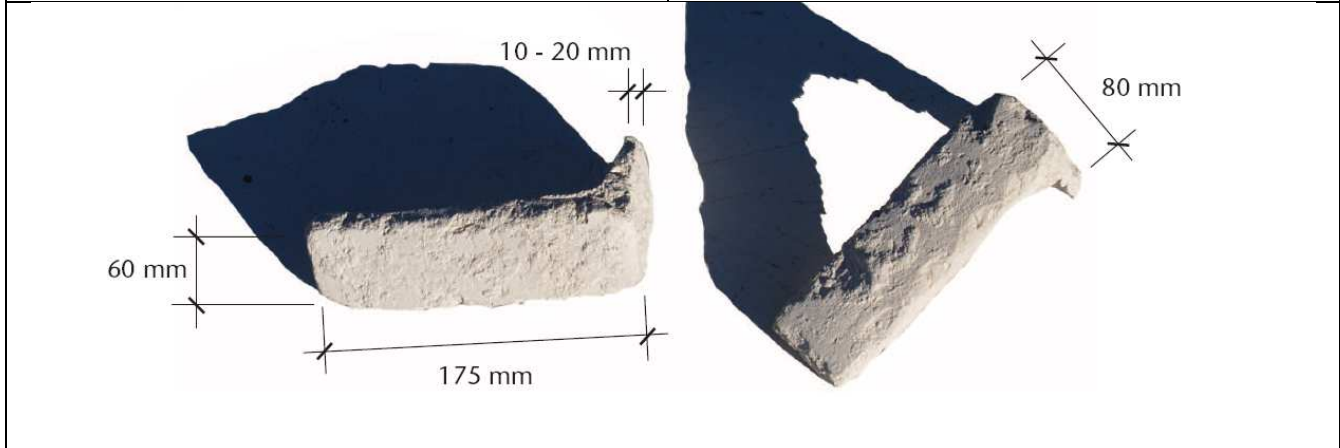

DESIGNATION OF THE MODEL:	LADRILLO VIEJO BLANCO ESQUINAS
MASS COLOURING:	BLANCO
THICKNESS:	Entre 10 y 20mm
NOMINAL DIMENSIONS:	175 x 80 x 60mm

TECHNICAL CHARACTERISTICS	TEST METHOD	VALUES GUARANTEED BY THE MANUFACTURER	TOLERANCES
<b>Appearance and colour.</b>			
Changes in design colour.	Visual	Not accepted	--
Changes in design appearance of the face.	Visual	Not accepted	--
<b>Dimensional characteristics.</b>			
Angle deviation.	UNE EN 14617-16 ECO-PE- 09	2,6	≤ 5,0mm
Side length (long).	UNE EN 14617-16 ECO-PE- 09	176,0	± 5mm
Side length (short).	UNE EN 14617-16 ECO-PE- 09	80,0	± 5mm
Corner piece width.	UNE EN 14617-16 ECO-PE- 09	61,0	± 5mm
Corner piece thickness.	UNE EN 14617-16 ECO-PE- 09	21,0	± 5mm
<b>Physical Characteristics.</b>			
Water absorption.	UNE EN 14617-1	7,9	8 ± 2 %
Apparent density.	UNE EN 14617-1	2100	Kg/m <sup>3</sup>
Efflorescence*.	UNE 67029 ECO-PE-08	Non - Efflorescent	--
<b>Mechanical characteristics.</b>			
Durability (Frost susceptibility).	UNE EN 14617-5	Non – Frost Susceptibility (NFS)	--
Compressive strength.	UNE EN 1015-11	28,0	± 2 MPa
Flexural strength	UNE EN 1015-11	4,5	± 0,5 MPa
Thermal shock resistance.	UNE EN 14617-6	No changes in appearance of the face	--
Adherence*.	UNE EN 1348	>1,0	± 0,5 MPa
Adherence**.	UNE EN 1015-12	No applicable	--
<b>TECHNICAL BUILDING CODE</b>			
Fire resistance.	EN ISO 1716:02 EN ISO 1182:02	CLASE A1*	CLASE A1*
Acoustic insulation***.	UNE EN ISO 140-3 UNE EN ISO 140-16	5 - 24	dB

\* Adhesive Cement recommended by ECOPIEDRA, S.L.

\*\* Mortar for Joints recommended by ECOPIEDRA, S.L.

\*\*\* At [www.ecopiedra.com](http://www.ecopiedra.com), in Data Sheets, see the sound reduction improvement Index for different construction solutions.